


NOTE
 1. ALL TRUCK AND TRACKING PAD
 SHALL CONFORM TO FEDERAL
 STANDARD 1584 & 1507
 RESPECTIVELY

2. DRAINING CONTRACTOR IS
 RESPONSIBLE FOR INSPECTING AND
 MAINTAINING EROSION CONTROL
 MEASURES THROUGHOUT
 CONSTRUCTION TO PREVENT
 SILTATION AND TO PREVENT
 POLLUTION OF NEARBY WATER
 BODIES. INSPECTIONS SHALL BE
 PERFORMED WEEKLY AND MONTHLY
 HOURS OF EVERY 8 HOURS
 LOCAL. RECORDS ARE REQUIRED
 WITHIN 24 HOURS OF DOCUMENTING
 ISSUE IN THE INSPECTION REPORT
 OR OTHERWISE NOTIFIED BY THE
 DIVISION OF SOILS


GENERAL CONSTRUCTION NOTES:

1. All work shall be in accordance with the Standard Specifications for Highway and
 Structural Construction, State of Wisconsin, latest Edition, as well as all applicable
 Ordinance and Department of Transportation, latest Edition, as well as all applicable
 Ordinances or local provisions.
2. All erosion control measures specified on this plan shall meet the design criteria,
 standards and specifications set forth in the Department of Natural Resources Wisconsin
 Standard Specifications.
3. The contractor shall notify the Division, all utility City Departments, and
 the appropriate local authority prior to any excavation or other work that requires
 a permit or other approval.
4. All portions of the site shall be stabilized in a timely manner to minimize the
 erosion of soil and material at any time.
5. The contractor shall notify the Division, all utility City Departments, and
 the appropriate local authority prior to any excavation or other work that requires
 a permit or other approval.
6. Public utility lines shall be located in accordance with the Division of
 Public Safety and shall be marked in accordance with the Division of Public Safety
 in the project shall be done to the TRACKING PAD entrance to the property.

7. Contractor shall be responsible for maintaining the Public
 Right-of-Way in the vicinity of the work area. There shall be
 a minimum of 10 feet of clear width from the work area under construction
 to the adjacent sidewalk.
8. Upon completion of the work on specified, proposed four
 (4) inches of compacted layer of 3/4 inch stone and
 gravel sand, (4) inches and 1/2 inch per the Technical Specifications
 shall be placed on the site.
9. All erosion control measures shall be maintained throughout the
 entire term of the project.

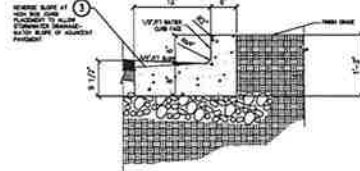

18" CONCRETE CURB & GUTTER

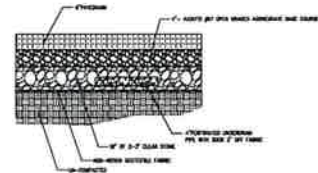

PERMEABLE PAVEMENT DETAIL

LEGEND

- NEW CONCRETE
- PERMEABLE PAVEMENT
- 4" PVC SLEEVE
- 937- EXISTING CONTOUR
- 937- PROPOSED CONTOUR
- SILT FENCE
- EXISTING FENCE
- EXISTING TREE & DIAMETER
- EXISTING LIGHTING TO BE REMOVED
- PROPOSED RUNOFF FLOW DIRECTION

SCALE: 1" = 30'

SURVEY NOTE

THE EXISTING BOUNDARY &
 TOPOGRAPHY SURVEY PROVIDED HEREON
 WAS PROVIDED BY LANDTECH SURVEYING
 ON 02/08/2015

THE UNDERGROUND UTILITY REVISIONS AS SHOWN
 HEREON IS BASED ON RATE, OWNER INFORMATION,
 PROVIDED BY SURVEY COMPANIES AND THE LEGAL
 MANUSCRIPT. WHILE THIS INFORMATION IS BELIEVED TO
 BE RELIABLE, ITS ACCURACY AND COMPLETENESS CANNOT
 BE GUARANTEED NOR CERTIFIED TO.

DATE	DESCRIPTION
12-01-13	ISSUE
01-08-14	ADD STALLS
01-08-14	REVISEMENTS
02-27-15	REVISEMENTS
03-03-15	REVISEMENTS
03-17-15	REVISEMENTS
03-17-15	REVISEMENTS

ELLEN BARBERBERG CONSULTANTS, LLC
 6750 W. WISCONSIN AVENUE
 Elgin Engineering Consultants, LLC • 700 Pilgrim Parkway, Suite 100 • Elm Grove, WI 53122
 Phone: 262-719-0183 • Fax: 262-457-2284 • Email: mitchell@elgineng.com

CHRIST THE KING LUTHERAN CHURCH
 Delafield, Wisconsin

PARKING LOT RECONSTRUCTION PLAN
 (WITH EROSION CONTROL)

SCALE: 1"=30' JOB NO.: DATE: 11-04-13
 CHECKED BY:

