


NOTE:
SILT FENCE AND TRACKING PAD SHALL CONFORM TO TECHNICAL STANDARDS 1056 & 1057 RESPECTIVELY.


GENERAL CONTRACTOR IS RESPONSIBLE FOR INSPECTING AND MAINTAINING ALL EROSION CONTROL MEASURES SHOWN HEREON PURSUANT TO NR216 & NR151. AT A MINIMUM, INSPECTIONS SHALL BE PERFORMED WEEKLY AND WITHIN 24 HOURS OF EVERY 0.5 INCH RAINFALL EVENT. REPAIRS ARE REQUIRED WITHIN 24 HOURS OF DOCUMENTING ISSUE IN THE INSPECTION REPORT OR OTHERWISE NOTIFIED BY THE DNR OR CITY OF DELAFIELD.

GENERAL CONSTRUCTION NOTES:

- All work shall be in accordance with the Standard Specifications for Highway and Structure Construction, State of Wisconsin, Latest Edition; the State of Wisconsin Plumbing Code AND the City of Delafield Ordinances, unless otherwise called for on the plans.
- All erosion control measures specified on this plan shall meet the design criteria, standards and specifications as set forth in the Department of Natural Resources Wisconsin Technical Standards.
- All erosion control devices (i.e., silt fence, gravel entrance, silt fence, etc.) shall be installed prior to commencing construction.
- All activities on the site shall be conducted in a logical sequence to minimize the area of bare soil exposed at any one time.
- The contractor shall notify Diggers Hotline, all utilities City Departments, and government units whose property may be affected by the contractor's operations at least three (3) days before breaking ground. Diggers Hotline number is 811.
- Public roads shall not be closed to traffic at any time. All ingress and egress traffic to the project shall be limited to the TRACKING PAD entrance to the property.
- Contractor shall be responsible for maintaining the Public Roadways and the existing paved areas. These areas shall be kept free of silt or dirt tracked from areas under construction by sweeping within 24hrs.
- Upon completion of the work as specified, respread four (4") inches of salvaged topsoil over all disturbed areas and provide seed, fertilizer and mulch per the Technical Standards; unless otherwise specified on the plan.
- All erosion control devices shall be routinely inspected every seven days or within 24 hours of a rainfall greater than 0.5 inches.

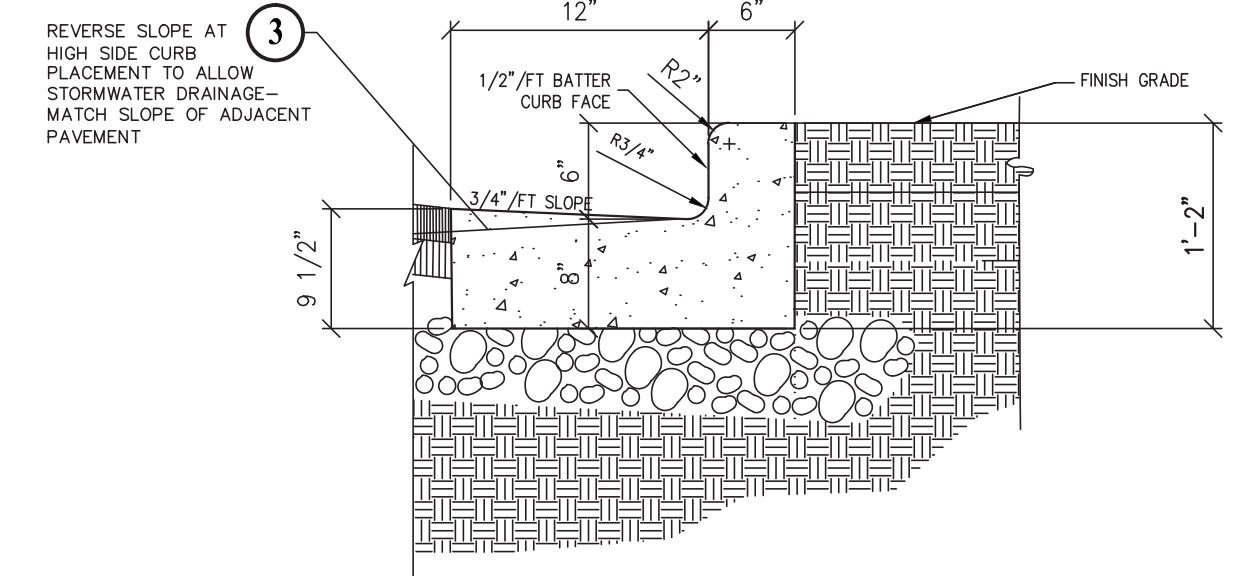

18" CONCRETE CURB & GUTTER
NO SCALE ①

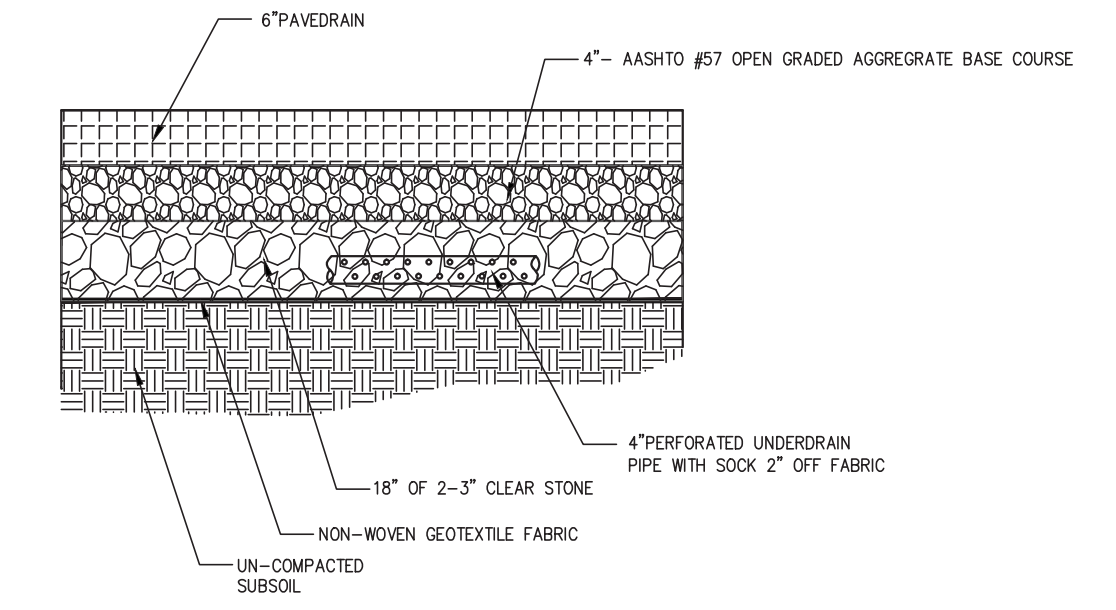

PERMEABLE PAVEMENT DETAIL
NO SCALE

LEGEND

- NEW CONCRETE
- PERMEABLE PAVEMENT
- 4" PVC SLEEVE
- EXISTING CONTOUR
- PROPOSED CONTOUR
- SILT FENCE
- EXISTING FENCE
- EXISTING TREE & DIAMETER
- EXISTING LIGHTING TO BE REMOVED
- PROPOSED RUNOFF FLOW DIRECTION

SURVEY NOTE:
THE EXISTING BOUNDARY & TOPOGRAPHIC SURVEY SHOWN HEREON WAS PROVIDED BY LANDTECH SURVEYING, DATED AUGUST, 2017.

THE UNDERGROUND UTILITY INFORMATION AS SHOWN HEREON IS BASED, IN PART, UPON INFORMATION FURNISHED BY UTILITY COMPANIES AND THE LOCAL MUNICIPALITY. WHILE THIS INFORMATION IS BELIEVED TO BE RELIABLE, ITS ACCURACY AND COMPLETENESS CANNOT BE GUARANTEED. NCP, CERTIFIED TO.

DATE	DESC.
12-01-13	ADD ISLANDS
01-09-14	ADD 4 STALLS
01-30-14	ADD RAINGARDEN
08-22-17	SITE PLAN
10-20-17	REV1
10-31-17	REV2-APPROVED
12-14-17	BID SET

ECC
ELLENA ENGINEERING CONSULTANTS, LLC
SITE CIVIL, ENGINEERING & STORMWATER MANAGEMENT
Ellena Engineering Consultants, LLC • 700 Pilgrim Parkway - Suite 100 • Elm Grove, WI 53122
Phone: 262-719-6183 • Fax: 866-457-2584 • Email: mellen@ececng.com

CHRIST THE KING LUTHERAN CHURCH
Delafield, Wisconsin

PARKING LOT RECONSTRUCTION PLAN
(WITH EROSION CONTROL)

SCALE: 1"=30' JOB NO.: DATE: 11-04-13
CHECKED BY:

C1

